

# TH682ST Digital Projector



## Features

- Enhanced Contrast Ratio (Darkchip3)
- Native 1080p resolution
- 3000AL High Brightness
- Short throw lens design
- Blu-ray Full HD 3D support

## Box Contents

- Lens Cover
- Remote Control w/ Battery
- Power Cord (by region)
- User Manual CD
- Quick Start Guide
- VGA(D-sub 15pin) Cable

## Dimension




## Optional Accessories

- Spare Lamp Kit: 5J.JCL05.001
- Ceiling Mount: 5J.JAM10.001
- Carry bag: 5J.J3T09.020
- 3D Glasses: 5J.J7L25.002



Because it matters

## Input and Output Terminals

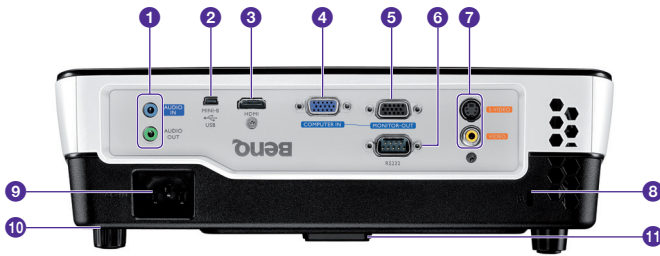

- 1 Audio input jack
- 2 Audio output jack
- 3 USB port
- 4 HDMI-input port
- 5 RGB (PC)/Component Video (YPbPr/YCbCr) signal input jack
- 6 RS232 control port
- 7 S-Video input jack
- 8 Video input jack
- 9 Kensington anti-theft lock slot
- 10 AC power jack
- 11 Rear adjuster foot
- 12 Ceiling mount holes

## Product Specifications

<b>Projection System</b>	DLP	
<b>Native Resolution</b>	Full HD (1920x1080)	
<b>Brightness</b>	3000AL	
<b>Contrast Ratio</b>	10000:1	
<b>Display Color</b>	1.07 Billion Colors	
<b>Lens</b>	F=2.6-2.7 f=10.2-11.22 mm	
<b>Aspect Ratio</b>	Native 16:9 (5 aspect ratio selectable)	
<b>Throw Ratio</b>	0.69~0.76(65.7"±3% @ 1m)	
<b>Image Size (Diagonal)</b>	60"~300"	
<b>Zoom Ratio</b>	1.1:1	
<b>Lamp Type</b>	210W	
<b>Lamp Mode (Normal/Economic/SmartEco)</b>	4000/6000/8000 hours	
<b>Keystone Adjustment</b>	1D,Vertical +/- 40 degrees	
<b>Projection Offset</b>	105% ±5%	
<b>Resolution Support</b>	VGA(640 x 480) to WUXGA_RB(1920X1200) *RB=Reduced blanking	
<b>Horizontal Frequency</b>	15~102KHz	
<b>Vertical Scan Rate</b>	23~120Hz	
<b>Compatibility</b>	HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
	Video Compatibility	NTSC, PAL, SECAM
	3D Compatibility	Frame Sequential: Up to 720p
	(Please refer to User's Manual for detailed support timing.)	Frame Packing: Up to 1080p
		Side by Side: Up to 1080i/p
		Top Bottom: Up to 1080p
<b>Interface</b>	Computer in (D-sub 15pin)	x 1
	Monitor out (D-sub 15pin)	x 1
	Composite Video in (RCA)	x 1
	S-Video in (Mini DIN 4pin)	x 1
	HDMI	x 1
	Audio in (Mini Jack)	x 1
	Audio out (Mini Jack)	x 1
	Speaker	x 1 (10W)
	USB (Type Mini B)	x 1
	RS232 (DB-9pin)	x 1
<b>Dimensions</b>	Dimensions(W x H x D)	311.8 x 104.7 x 247.5 mm (with feet)
	Weight	311.8 x 94.7 x 247.5 mm (without feet)
		2.8kg(6.39 lbs)
<b>Power</b>	Power Supply	AC100 to 240V, 50 to 60 Hz
	Power Consumption	Normal 280W, Eco 230W, Standby <0.5W
<b>Audible Noise</b>	36/33 dBA (Normal/Economic mode)	
<b>On-Screen Display Languages</b>	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)	

\* Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.

## Logistics Information

<b>Product Code</b>	9HJCL77.13E
<b>EAN Code</b>	471 8755 05347 4
<b>Dimensions Single Carton (cm)</b>	37.50 x 20.60 x 34.50
<b>Carton Weight (kg)</b>	4,27
<b>Pallet Qty</b>	70



**BenQ Europe B.V.**  
 Meerenakkerweg 1-17  
 5652 AR Eindhoven  
 The Netherlands  
 Tel: +31 88 8889200  
 Fax: +31 88 8889299

© 2014 BenQ Corp. Specification may vary by region, please visit your local stores for details. Actual product's features and specifications are subject to change without notice. This material may include corporate names and trademarks of third parties which are the properties of the third parties respectively. Doc.: PRJ HB BR EN 0301



Because it matters